
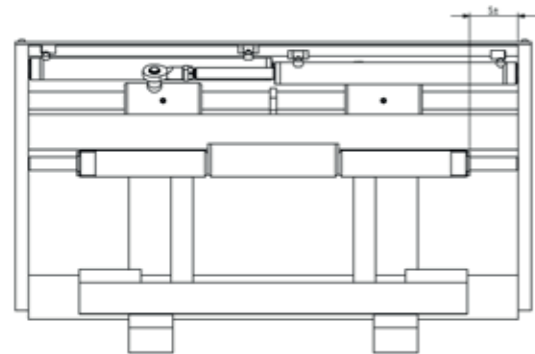
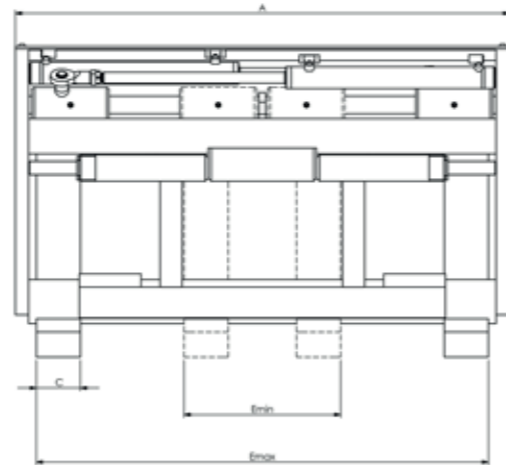


PMC 11

- Capacity 1800–7000 kg
- Advantage to have forks in maximum opening range and still side shift
- Frame with separate side shift for best side shift control movement
- Fits counterbalance forklift trucks
- Capacity, width, forks and opening ranges can be changed to customer request

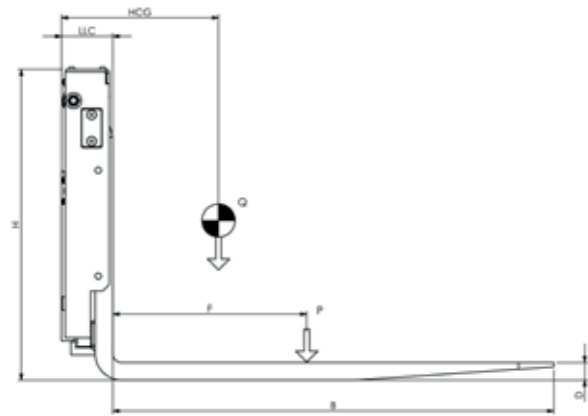

Capacity (P)	Load center (F)	Width (A)	Unit dimensions						Weight (Q*)	Article no. PMC name - Width - forks - integration	Description Model-capacity-forks CxDxB
			H*	LLC	HCG	Emin*	Emax*	Sideshift* ± (S)			
1800	500	920	665	110	257	355	825	100	249	55071-XXXX-XX-XX	PMC11-1800-100X40X1200
		970			251		875		255		
		1020			245		925		261		
		1070			239		975		267		
		1120			233		1025		273		
		1170			227		1075		279		
1220	221	1125	285								
2000	500	920	705	115	242	355	825	100	250	55072-XXXX-XX-XX	PMC11-2000-100X40X1200
		970			237		875		256		
		1020			232		925		262		
		1070			227		975		268		
		1120			222		1025		274		
		1170			217		1075		280		
1220	212	1125	286								
2500	500	1020	705	115	238	355	925	100	252	55073-XXXX-XX-XX	PMC11-2500-100X40X1200
		1070			233		975		258		
		1120			228		1025		264		
		1170			223		1075		270		
		1220			218		1125		276		
		1270			213		1175		282		
1320	208	1225	288								
3000	600	1020	705	120	277	355	925	100	289	55074-XXXX-XX-XX	PMC11-3000-125X45X1200
		1070			271		975		295		
		1120			265		1025		301		
		1170			259		1075		307		
		1220			253		1125		313		
		1270			247		1175		319		
1320	241	1225	325								
3500	600	1070	705	125	272	355	975	100	322	55075-XXXX-XX-XX	PMC11-3500-125X50X1200
		1120			266		1025		328		
		1170			260		1075		334		
		1220			254		1125		340		
		1270			248		1175		346		
		1320			242		1225		352		
1370	236	1275	358								
1420	230	1325	364								
1470	224	1375	370								
1520	218	1425	376								
1570	212	1475	382								
1620	206	1525	388								
4000	600	1200	800	130	243	360	1110	100	395	55076-XXXX-XX-XX	PMC11-4000-125X50X1200
		1300			237		1210		401		
		1400			231		1310		407		
		1500			225		1410		413		
		1600			219		1510		419		
		1700			213		1610		425		
1800	207	1710	431								
4500	600	1200	800	130	256	390	1110	100	424	55077-XXXX-XX-XX	PMC11-4500-150X50X1200
		1300			250		1210		430		
		1400			244		1310		436		
		1500			238		1410		442		
		1600			232		1510		448		
		1700			226		1610		454		
1800	220	1710	460								
1900	214	1810	466								
2000	208	1910	472								
5000	600	1200	797	140	254	390	1110	100	445	55078-XXXX-XX-XX	PMC11-5000-150X50X1200
		1300			248		1210		457		
		1400			242		1310		469		
		1500			236		1410		481		
		1600			230		1510		493		
		1700			224		1610		505		
1800	218	1710	517								
1900	212	1810	529								
2000	206	1910	541								
7000	600	1600	862	160	253	390	1510	100	593	55079-XXXX-XX-XX	PMC11-7000-150X60X1200
		1700			249		1610		610		
		1800			245		1710		627		
		1900			241		1810		644		
		2000			237		1910		661		
		2100			233		2010		678		
2200	229	2110	695								
2300	225	2210	712								
2400	221	2310	729								

S* can change to customer request.
 Q* Weights are estimated and can differ between customer request.
 H* Height is with the ISO 2328 Class A mounting
 Options: Capacity, width, forks and opening ranges can change to customer request.
 Emin* and Emax* in the table only shows the standard.