
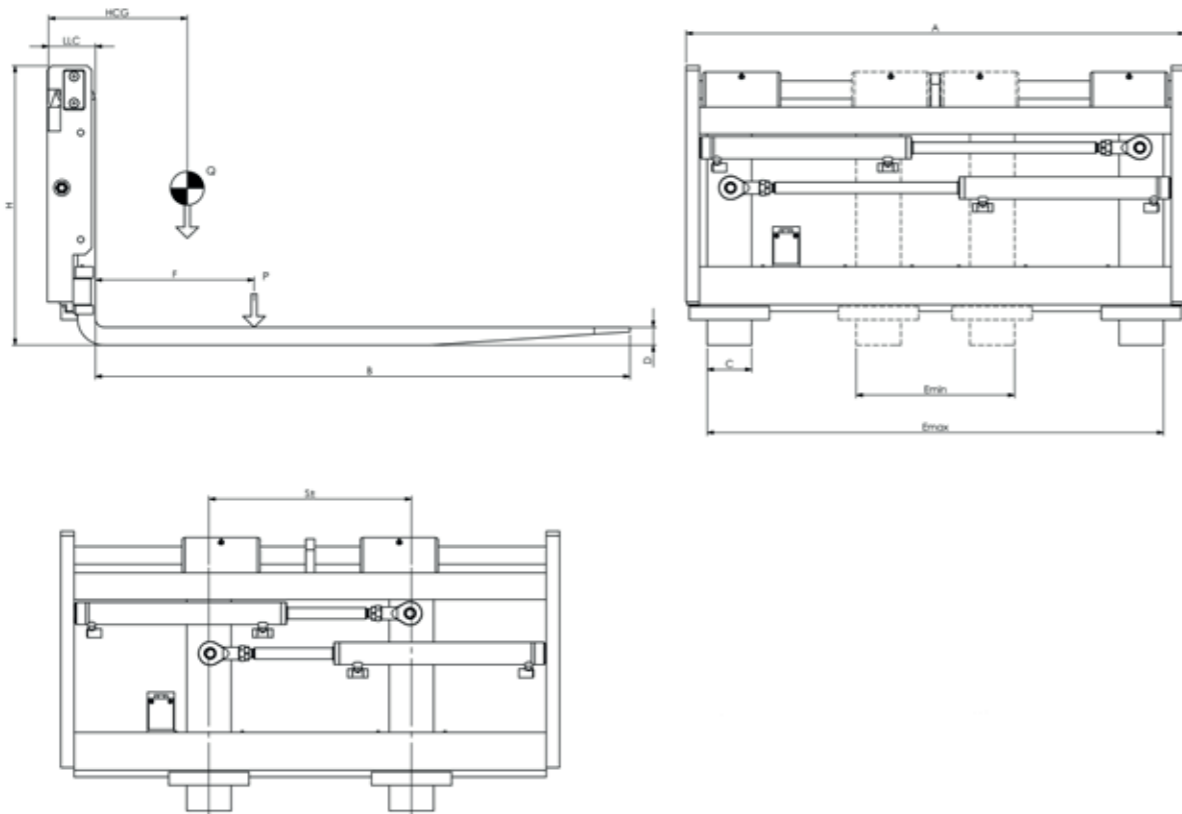


# PMC 9

- Capacity 1800–7000 kg
- Hook-on attachment with fork positioning with sideshift
- See ISO2328 table on pages 3 for best capacity
- Fits counterbalance forklift trucks
- Capacity, width, forks and opening ranges can be changed to customer request

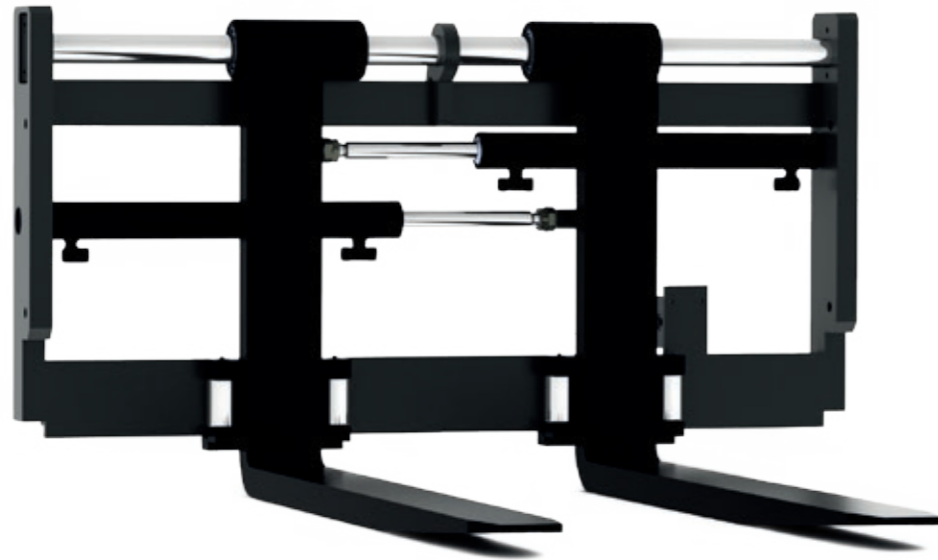

ISO Class	Capacity (P)	Load center (F)	Width (A)	Unit dimensions					Weight (Q)	Article no. PMC name - Width - forks - integration	Description Model-capacity-forks	
				H*	LLC	HCG	Emin*	Emax*				Sideshift ± (S)
ISO 1 ISO 2	1800	500	920	586	120	267	355	825	115	184	55040-XXXX-XX-XX	PMC9-1800-100x40x1200
			970			263		875	128	188		
			1020			259		925	141	192		
			1070			255		975	154	196		
			1120			251		1025	167	200		
			1170			247		1075	180	204		
1220	243	1125	193	208								
ISO 2	2500	500	1020	627	120	241	355	925	141	199	55041-XXXX-XX-XX	PMC9-2500-100x40x1200
			1070			239		975	154	202		
			1120			237		1025	167	205		
			1170			235		1075	180	208		
			1220			233		1125	193	211		
			1270			231		1175	206	214		
1320	229	1225	219	217								
ISO 3	3000	500	1070	727	125	265	355	975	154	255	55042-XXXX-XX-XX	PMC9-3000-125x45x1200
			1120			263		1025	167	258		
			1170			261		1075	180	261		
			1220			259		1125	193	264		
			1270			257		1175	206	267		
			1320			255		1225	219	270		
ISO 3	3500	600	1070	724	135	267	355	975	154	309	55043-XXXX-XX-XX	PMC9-3500-125x50x1200
			1120			265		1025	167	313		
			1170			263		1075	180	317		
			1220			261		1125	193	321		
			1270			259		1175	206	325		
			1320			257		1225	219	329		
			1370			255		1275	232	333		
			1420			253		1325	245	337		
			1470			251		1375	258	341		
			1520			249		1425	274	345		
			1570			247		1475	284	349		
			1620			245		1525	297	353		
ISO 3	4000	600	1200	751	135	242	360	1110	188	342	55044-XXXX-XX-XX	PMC2-4000-125x50x1200
			1300			236		1210	213	353		
			1400			230		1310	238	364		
			1500			224		1410	263	375		
			1600			218		1510	288	386		
			1700			212		1610	313	397		
1800	206	1710	338	408								
ISO 3	4500	600	1200	751	135	255	390	1110	188	373	55045-XXXX-XX-XX	PMC2-4500-150x50x1200
			1300			249		1210	213	384		
			1400			243		1310	238	395		
			1500			237		1410	263	406		
			1600			231		1510	288	417		
			1700			225		1610	313	428		
			1800			219		1710	338	439		
			1900			213		1810	363	450		
			2000			207		1910	388	461		
			ISO 3 ISO 4			5000		600	1200	802		
1300	226	1210		213	420							
1400	221	1310		238	432							
1500	216	1410		263	444							
1600	211	1510		288	450							
1700	205	1610		313	468							
1800	201	1710		338	480							
1900	196	1810		363	492							
2000	191	1910		388	504							
ISO 4 ISO 5	7000	600		1600	862		165		225		490	1490
			1700	221		1590		275	597			
			1800	217		1690		300	614			
			1900	213		1790		325	631			
			2000	209		1890		350	648			
			2100	205		1990		375	665			
			2200	201		2090		400	682			
			2300	197		2190		425	699			
			2400	193		2290		450	716			

Q\* Weights are estimated and can differ between customer request.  
H\* Height is with the ISO 2328 Class A mounting.  
Options: Capacity, width, forks and opening ranges can change to customer request.  
Emin\* and Emax\* in the table only shows the standard