


PMC 4

- Capacity 1800–5000 kg
- Integrated fork-positioning with sideshift
- Cylinder on top
Very good hose routing for hydraulic extension forks
- Maximum opening range both spread and extension of forks
- Capacity, width, forks and opening ranges can be changed to customer request
- Fits counterbalance forklift trucks

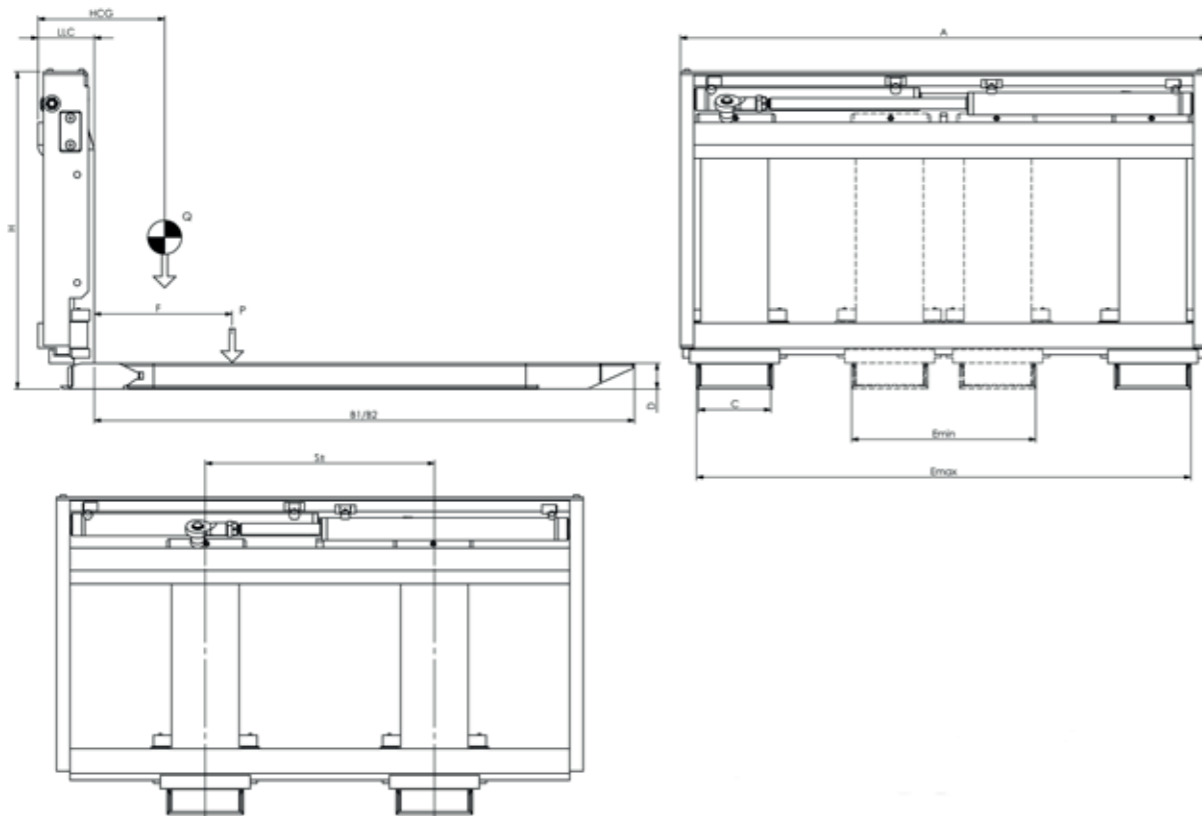

Capacity (P)	Load center (F)	Width (A)		Unit dimensions					Weight(Q*)	Article no PMC name - Width - forks - integration	Description Model-capacity-forks B1/B2 Retracted/Stroke
		H*	LLC	HCG Retracted/Extended	Emin *	Emax *	Sideshift ± (S)				
1800	500	920	665	125	334/428	360	830	118	253	55017-XXXX-XX-XX	PMC4-1800-1200/0800
		970			330/423		880	130	257		
		1020			326/418		930	143	261		
		1120			322/413		980	155	265		
		1170			318/408		1030	168	269		
		1220			314/403		1080	181	273		
2500	500	1020	705	125	324/424	401	936	143	309	55018-XXXX-XX-XX	PMC4-2500-1200/0850
		1070			320/419		986	155	312		
		1120			316/414		1036	168	315		
		1170			312/409		1086	181	318		
		1220			308/404		1130	193	321		
		1270			304/399		1186	206	324		
3000	600	1070	705	125	317/416	401	986	155	317	55019-XXXX-XX-XX	PMC4-3000-1200/0850
		1120			313/411		1036	168	322		
		1170			309/406		1086	181	327		
		1220			305/401		1136	193	332		
		1270			301/396		1186	206	337		
		1320			297/391		1230	219	342		
3500	600	1070	705	130	306/402	401	991	154	336	55020-XXXX-XX-XX	PMC4-3500-1200/0850
		1120			303/397		1041	168	339		
		1170			300/392		1091	181	342		
		1220			297/387		1141	194	345		
		1270			294/382		1191	207	348		
		1320			291/377		1241	220	351		
		1370			288/372		1291	233	354		
		1420			285/367		1341	246	357		
		1470			282/362		1391	259	360		
		1520			279/357		1441	272	363		
		1570			276/352		1491	285	366		
		1620			273/347		1541	298	369		
4000	600	1200	797	135	293/396	401	1121	188	385	55021-XXXX-XX-XX	PMC4-4000-1200/0850
		1300			288/389		1221	213	394		
		1400			283/382		1321	236	403		
		1500			278/375		1421	263	412		
		1600			273/368		1521	288	421		
		1700			268/361		1621	313	430		
4500	600	1200	797	140	314/431	401	1121	188	447	55022-XXXX-XX-XX	PMC4-4500-1200/0850
		1300			308/422		1221	213	457		
		1400			302/413		1321	236	467		
		1500			296/404		1421	263	477		
		1600			290/395		1521	288	487		
		1700			284/386		1621	313	497		
		1800			278/377		1721	338	507		
		1900			272/368		1821	363	517		
		2000			266/359		1921	388	527		
		5000			600		1200	848	150		
1300	306/415		1221	213		480					
1400	300/406		1321	236		492					
1500	294/397		1421	263		504					
1600	288/388		1521	288		516					
1700	282/379		1621	313		528					
1800	276/370		1721	338		540					
1900	270/361		1821	363		552					
2000	264/352		1921	388		564					

Q* Weights are estimated and can differ between customer request.
H* Height is with the ISO 2328 Class A mounting
Options: Capacity , width , forks and opening ranges can change to customer request.
Emin* and Emax* in the table only shows the standard.
Capacity and load center can change depending on the hydraulic extension forks
Table for C and D varies depending on what extension fork is used.